


*A Division of the Angelus Corporation*  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 N220 W1051 Springdale Road, Waukesha, WI 53186

Approved : *PFT*  
 Distribution : USER

Date : 07/03/02  
 Rev. 6 (05/23/22)  
 Uncontrolled if Printed

**BNC 90° Plug**  
*for V75268 / V76261 / V73263*

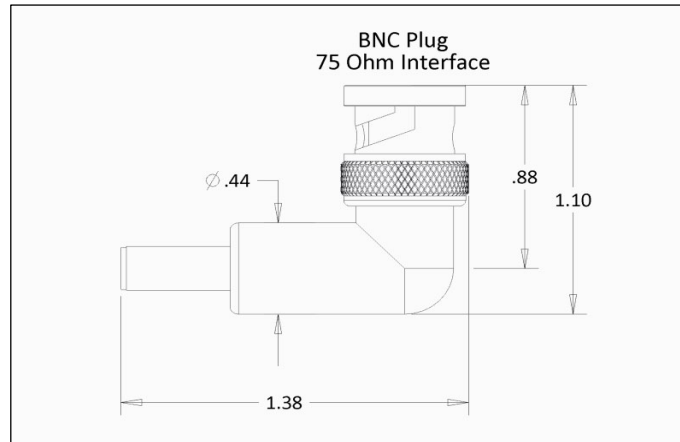

*Features Not Shown: Seal in front*

**PERFORMANCE**

Nominal Impedance 75 Ohms  
 Frequency Range 0 - 2 GHz  
 Voltage Rating 500 VRMS  
 Insulation Resistance 5000 Megohms

**CONNECTOR WEIGHT (Each)**

.90 ounces (25.52 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION****Crimp Tooling:**

*Center Contact* M22520 / 2 - 01 Tool :  
 Selector Dial @ # 7  
 Recommended Positioner :  
 PIC P/N 110205 (Daniels K224-1)  
 (Alternate - Daniels K224)

*Crimp Ferrule* M22520 / 5 - 01 Tool :  
 Die Set M22520 / 5 - 41  
 Cavity B (.178 hex)  
 PIC P/N 110333, (Daniels # Y140)

**CONSTRUCTION****Materials:**

Body Zinc  
 Center Contact Copper Alloy  
 Bayonet sleeve Brass  
 Ferrule & Crimp sleeve Brass  
 Dielectric PTFE  
 Gasket Silicone Rubber

**Finish :**

Body, Ferrule Nickel  
 Center Contact Gold

*Applicable Standards* MIL-STD 348  
 MIL-PRF-39012

**Notes :**

- 1) A 2.0" piece of Raychem ATUM heat shrink P/N ATUM-12/3-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.