


PIC Wire & Cable <i>A Division of the Angelus Corporation</i> 262-246-0500 Fax 262-246-0450 PO Box 330 Sussex, WI 53089	Connector Specification	P/N 110251
	Approved <i>MCT</i>	Date 02/22/00
	Distribution : USER	Rev. 1 (06/26/13) Uncontrolled Document

QLA 00 to BNC Jack Adapter

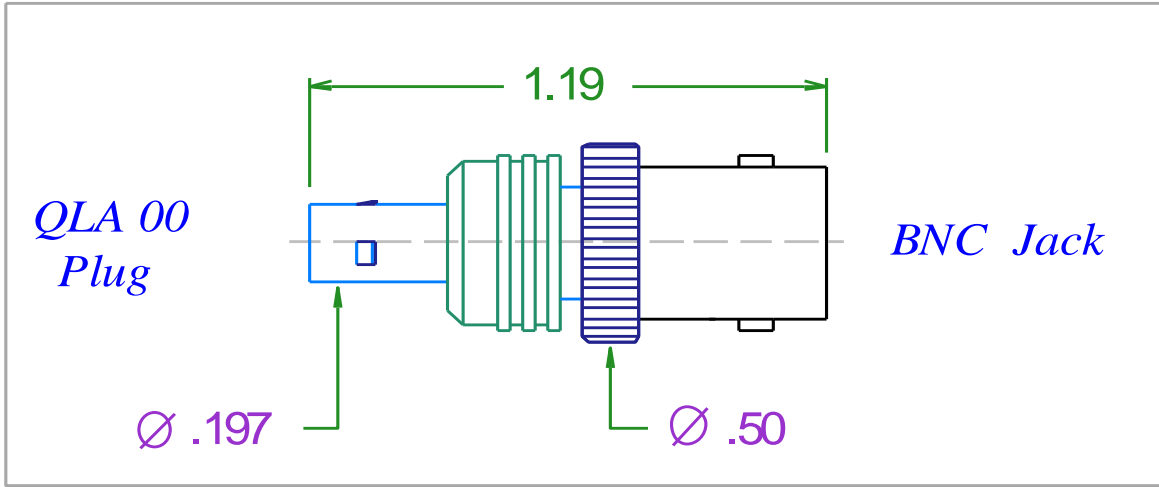

PERFORMANCE

Impedance	50 Ohms
Frequency Range	0 - 1.4 GHz
Voltage Rating	

CONNECTOR WEIGHT (Each)

tbd

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Recommended Jam Nut Torque - 35 to 40 in. lbs.

CONSTRUCTION

Materials:

Connector Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Outer Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1

Finish :

Body	Bright Nickel
Center Contact	Gold

Applicable Standards

Mil-Std 348, Mil-C-39012