
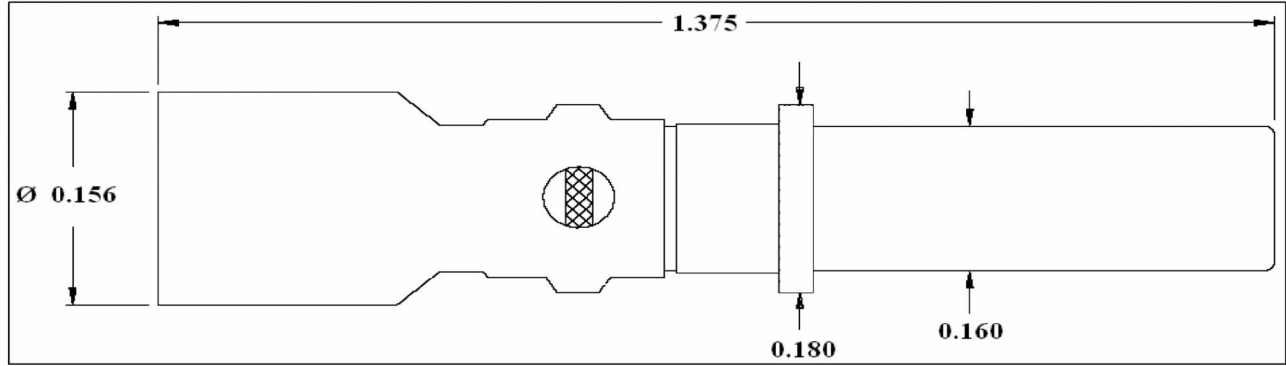


A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 PO Box 330 Sussex, WI 53089

Approved :   
 Distribution : USER

Date : 08/10/10  
 Rev. 3 (08/17/15)  
 Uncontrolled if Printed

**M39029 Size 12 Coax Socket Contact**  
*for V73263, V75268 and V76261*



**PERFORMANCE**

Nominal Impedance : Non-Constant  
 Temperature Range : -55 °C to 125 °C

**CONNECTOR WEIGHT**

.051 ounces (1.44 grams)

**MATES WITH**

PIC P/N 110510 - Size 12 Pin Contact

**RoHS COMPLIANT**

Does not comply to RoHS standards

**CONSTRUCTION**

**Materials :**

Contact Body : Beryllium Copper  
 ASTM B196

Inner Contact : Beryllium Copper  
 ASTM B196

Dielectric : ETFE  
 ASTM D3159

**Finish :**

Contact Body : Gold over Nickel  
 Outer Contact : Gold over Nickel

**Applicable Standards :**

M39029/75  
 MIL-C-38999 Series I, III and IV

**Notes :**

1) Please refer to TV-110500 Termination Instruction sheet for strip dimensions & instructions.