


<b>PIC Wire &amp; Cable</b> <i>A Division of the Angelus Corporation</i> Ph 262-246-0500      Fax 262-246-0450 PO Box 330 Sussex, WI 53089	<b>Connector Specification</b>	<b>110677</b>
	Approved <i>MCT</i>	Date 01/13/12
	Distribution : USER	Rev. 2 (06/20/13) Uncontrolled Document

**F Straight Plug**  
for V73263, V75268, and V76261

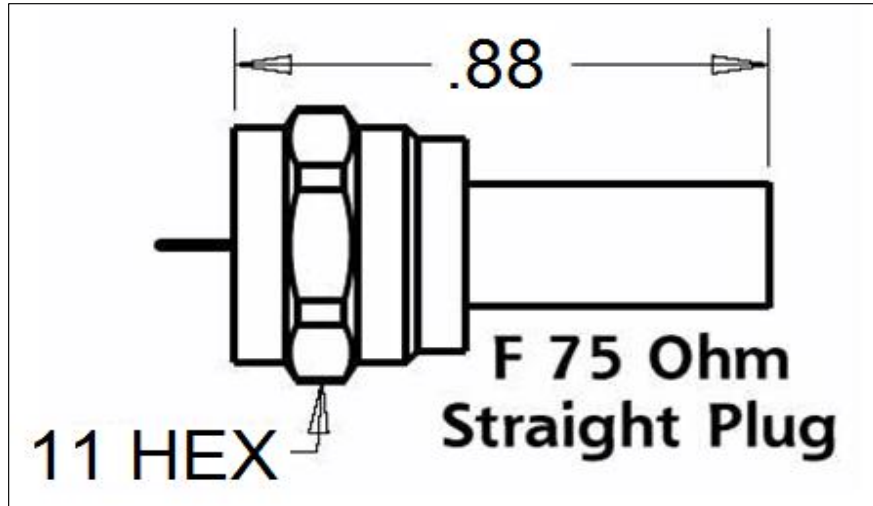

**PERFORMANCE**

Nominal Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	325 VRMS

**CONNECTOR WEIGHT (Each)**

0.21 ounces (6.01 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

***Crimp Tooling:***

<i>Center Contact</i>	M22520 / 2 - 01 Tool : Selector @ # 5 Recommended Positioner : DMC # K850
<i>Crimp Ferrule</i>	M22520 / 5 - 01 Tool : Die Set M22520 / 5 - 41 Cavity B (.178" hex) PIC P/N 110333, (Daniels # Y140)

**CONSTRUCTION**

***Materials:***

Body	Brass
Center Contact	Brass
Ferrule	Brass
Dielectric	PTFE

***Finish :***

Body, Ferrule	Nickel
Center Contact	Gold

***Notes :***

- 1) A 1.5" piece of Raychem ATUM heat shrink P/N ATUM-8/2-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-1907XX Termination Instruction sheet for strip dimensions & instructions.